


■ CELL CHARACTERISTICS

Capacity	Typical	5000 mAh
		18.0 Wh
	Minimum	4800 mAh
		17.3 Wh
Cell Voltage	Nominal	3.6 V
	Charge	4.2 V
	Discharge	2.5 V
Charge Current	Standard	2.5 A
Charge Time	Standard	2.7 hr
Discharge Current	Continuous	15 A
Temperature	Charge	0°C to 45°C
	Discharge	-30°C to 60°C
Energy Density	Volumetric	704 Wh/l
	Gravimetric	269 Wh/kg
Typical Impedance	AC (1 KHz)	15 mΩ
	DC (10A/10s)	25 mΩ

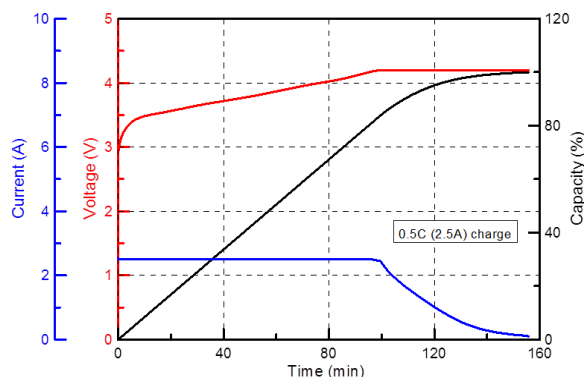
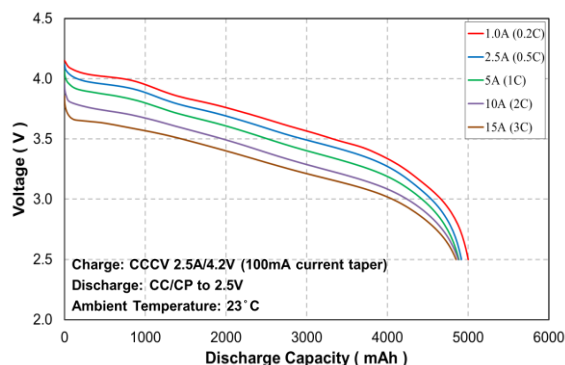
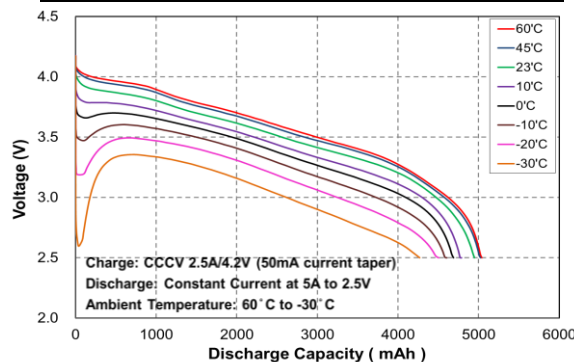
■ PHYSICAL CHARACTERISTICS


Shape	Cylindrical
Can	Steel
Diameter	21.7 mm (Max)
Height	70.2 mm (Max)
Weight	70 g (Max)

The information contained herein is for reference only and does not imply a performance guarantee or a product warranty. Specifications and characteristics are subject to change without prior notice. This product is not designed or produced for use in any vape or e-cigarette devices.

For application specific information, please contact E-One Moli Energy Sales and Applications or the nearest MOLICEL® recognized agent.

Version: 1.4

■ Charge Characteristics

■ Discharge Rate Characteristics

■ Discharge Temperature Characteristics

■ Cycle Characteristics
